LED
A-LAMP
LIGHT

www.sotac.com.tw

CE ERP FC SAA

Incandescent wattage comparison refers EU ERP standard if not specified. *Energy star* ERP

A45(A15) Series

Both Standard And Dimmable (5%-100%) Are Available
Rated Voltage: 100V, 120V, 220-240V, 90-250V, 50/60Hz
Color Temperature: 2700K,3000K,4000K,5000K,6500K
Average Lifetime: 15000h,25000h,30000h
Color Rendering Index(TYPE): 80,90
Base: E12,E14,E17,E26,E27,B22d,B15d
Beam Spread angle: 260°(Clear), 230°(Frosted), 270°(Omni)
Housing: Thermal plastics with metal heatsink
UV and IR free, Mercury free
RoHS compliant

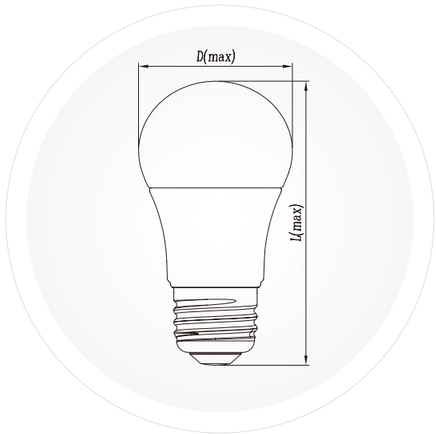

A45(A15)

CE ERP FC SAA

Incandescent wattage comparison refers EU ERP standard if not specified. *Energy star* ERP

LED A-lamp Light

A45(A15) Series

Series	Model Number		Watt (W)	Incandescent Wattage Comparison (W)	Luminous Flux(lm)	Base	M.O.L(mm/in)				M.O.D (mm/in)
	Standard	Dimmable					E12	E14	E26	E27	
Clear- Wide Beam Angle Series											
A45 (A15)	K-L3A45A2-4W (K-L3A15A2-4W)	K-L3A45A2D-4W (K-L3A15A2D-4W)	4	A45(A15):25	250	E12,E14, E17,E26, E27,B22d ,B15d	88.4/ 3.48	91/ 3.58	88.4/ 3.48	92/ 3.62	48/ 1.89
	K-L3A45A2-5W (K-L3A15A2-5W)	K-L3A45A2D-5W (K-L3A15A2D-5W)	5	A45(A15):30	350						
	K-L3A45A2-7W (K-L3A15A2-7W)	K-L3A45A2D-7W (K-L3A15A2D-7W)	7	A45(A15):40	470						
Frost-Wide Beam Angle Series											
A45 (A15)	K-L3A45-4W (K-L3A15-4W)	K-L3A45D-4W (K-L3A15D-4W)	4	A45(A15):25	250	E12,E14, E17,E26, E27,B22d ,B15d	88.4/ 3.48	91/ 3.58	88.4/ 3.48	92/ 3.62	48/ 1.89
	K-L3A45-5W (K-L3A15-5W)	K-L3A45D-5W (K-L3A15D-5W)	5	A45(A15):30	350						
	K-L3A45-7W (K-L3A15-7W)	K-L3A45D-7W (K-L3A15D-7W)	7	A45(A15):40	470						
Frost-Omni Series											
A45 (A15)	K-L3A45-OM-4W (K-L3A15-OM-4W)	K-L3A45D-OM-4W (K-L3A15D-OM-4W)	4	A45(A15):25	350	E12,E14, E17,E26, E27,B22d ,B15d	88.4/ 3.48	91/ 3.58	88.4/ 3.48	92/ 3.62	48/ 1.89
	K-L3A45-OM-5.5W (K-L3A15-OM-5.5W)	K-L3A45D-OM-5.5W (K-L3A15D-OM-5.5W)	5.5	A45(A15):40	450						

Product specifications subjects to change without prior notice.

A55(A17), A60(A19), A65(A19), A67(A21) Series

Both Standard And Dimmable (5%-100%) Are Available
Rated Voltage: 100V, 120V, 220-240V, 90-250V, 50/60Hz
Color Temperature: 2700K,3000K,4000K,5000K,6500K
Average Lifetime: 15000h,25000h,30000h
Color Rendering Index(TYPE): 80,90
Base: E26,E27,B22d,GU24
Beam Spread angle: 230°,270°
Housing: Thermal plastics with metal heatsink
UV and IR free, Mercury free
RoHS compliant

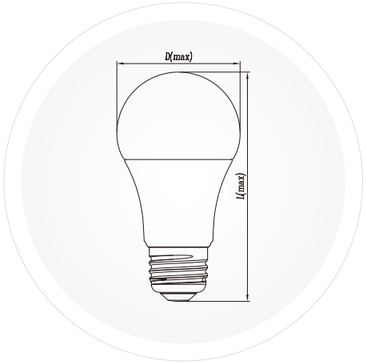

B22d GU24

A55(A17)

+

L26A60(A19)

L24A60(A19)

+

L27A65(A19)

+

L30A65(A19)

+

L6A67(A21)

A55(A17), A60(A19), A65(A19), A67(A21) Series

Series	Model Number		Watt (W)	Incandescent Wattage Comparison (W)	Luminous Flux(lm)	Base	M.O.L(mm/in)			M.O.D (mm/in)
	Standard	Dimmable					E26	E27	B22D	
A55 (A17)	K-L3A55-5W (K-L3A17-5W)	K-L3A55D-5W (K-L3A17D-5W)	5	A55(A17):25	350	E26,E27, B22d	102.5/ 4.04	105.5/ 4.15	104.5/ 4.11	55/ 2.17
	K-L3A55-6W (K-L3A17-6W)	K-L3A55D-6W (K-L3A17D-6W)	6	A55(A17):40	470					
	K-L3A55-7W (K-L3A17-7W)	K-L3A55D-7W (K-L3A17D-7W)	7	A55(A17):50	600					
A60 (A19)	K-L24A60-5W (K-L24A19-5W)	K-L24A60D-5W (K-L24A19D-5W)	5	A60(A19):35	400	E26, E27, B22d, GU24	112.5/ 4.43	115.5/ 4.55	114.5/ 4.51	60/ 2.36
	K-L24A60-6W (K-L24A19-6W)	K-L24A60D-6W (K-L24A19D-6W)	6	A60(A19):40	470					
	K-L24A60-8W (K-L24A19-8W)	K-L24A60D-8W (K-L24A19D-8W)	8	A60(A19):50	640					
	K-L24A60-9W (K-L24A19-9W)	K-L24A60D-9W (K-L24A19D-9W)	9	A60(A19):60	810					
A60 (A19)	K-L26A60-5W (K-L26A19-5W)	K-L26A60D-5W (K-L26A19D-5W)	5	A60(A19):35	400	E26,E27, B22d	107.5/ 4.23	110/ 4.33	109/ 4.29	60/ 2.36
	K-L26A60-6W (K-L26A19-6W)	K-L26A60D-6W (K-L26A19D-6W)	6	A60(A19):40	470					
	K-L26A60-8W (K-L26A19-8W)	K-L26A60D-8W (K-L26A19D-8W)	8	A60(A19):50	640					
	K-L26A60-9W (K-L26A19-9W)	K-L26A60D-9W (K-L26A19D-9W)	9	A60(A19):60	810					
A65 (A19)	K-L27A65-11W (K-L27A19-11W)	K-L27A65D-11W (K-L27A19D-11W)	11	A65(A19):70	950	E26,E27, B22d	112.5/ 4.43	115.5/ 4.55	114.5/ 4.51	64/ 2.52
	K-L27A65-12W (K-L27A19-12W)	K-L27A65D-12W (K-L27A19D-12W)	12	A65(A19):75	1055					
	K-L30A65-13W (K-L30A19-13W)	K-L30A65D-13W (K-L30A19D-13W)	13	A65(A19):90	1250	E26,E27, B22d	125/ 4.92	128/ 5.04	127/ 5.00	64/ 2.52
	K-L30A65-15W (K-L30A19-15W)	K-L30A65D-15W (K-L30A19D-15W)	15	A65(A19):100	1521					
A67 (A21)	K-L6A67-15W (K-L6A21-15W)	K-L6A67D-15W (K-L6A21D-15W)	15	A67(A21):100	1522	E26,E27, B22d	135/ 5.31	138/ 5.43	137/ 5.39	70/ 2.76

Product specifications subjects to change without prior notice.

Incandescent wattage comparison refers EU ERP standard if not specified. *Energy star* ERP

LED A-lamp Light

A19, A21 3-Way Series

Both Standard And Dimmable (5%-100%) Are Available
Rated Voltage: 120V, 60Hz
Color Temperature: 2700K, 3000K,4000K, 5000K, 6500K
Average Lifetime: 15000h, 25000h, 30000h
Color Rendering Index(TYPE): 80,90
Base: E26
Beam Spread angle: 230°, 270°
Housing: Thermal plastics with metal heatsink
UV and IR free, Mercury free
RoHS compliant

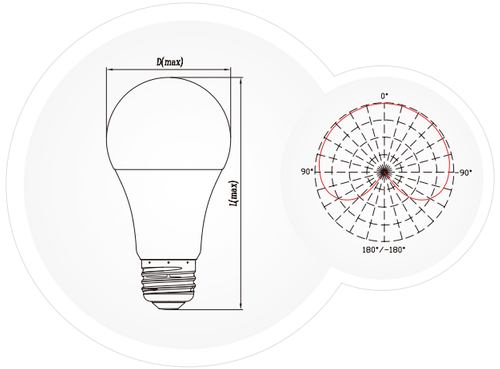

L24A19 L27A19 L4A21

Series	Model Number / Standard	Watt (W)	Incandescent Wattage Comparison (W)	Luminous Flux(lm)	Base	M.O.L(mm/in)	M.O.D (mm/in)
3-Way Series							
A19Y	K-L24A19Y-10W	10(10/7/4)	A19:60(60/40/25)	800/450/250	E26	112.5/4.43	61/2.4
	K-L27A19Y-12W	12(12/8/5)	A19:75(75/60/40)	1100/800/450		112.5/4.43	64/2.52
A21Y	K-L4A21Y-17W	17(17/11/5)	A21:100(100/75/40)	1500/1100/500		134/5.28	70.1/2.76
	K-L4A21Y-20W	20(20/14/5)	A21:150(150/100/50)	2150/1500/600		134/5.28	70.1/2.76

Product specifications subjects to change without prior notice.

T Lamp Series

Rated Voltage: 100V, 120V,220-240V, 90-250V, 50/ 60Hz
Color Temperature: 2700K, 3000K,4000K, 5000K, 6500K
Average Lifetime: 15000h, 25000h, 30000h
Color Rendering Index(TYPE): 80,90
Base: E26,E27
Beam Spread angle: 200°
Housing: Thermal plastics with metal heatsink
UV and IR free, Mercury free
RoHS compliant

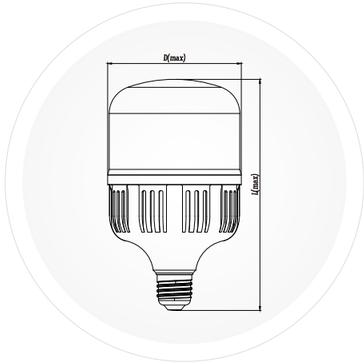

Series	Model Number / Standard	Watt (W)	Incandescent Wattage Comparison (W)	Luminous Flux(lm)	Base	M.O.L(mm/in)	M.O.D (mm/in)
T series	K-L2T80-20W	20	T80:120	1850	E26, E27	150/5.91	80/3.15
	K-L2T100-24W	24	T100:140	2250		180/7.09	100/3.94
	K-L2T100-30W	30	T100:150	2550		180/7.09	100/3.94
	K-L2T120-40W	45	T120:200	3350		215/8.46	120/4.72
	K-L2T1400-50W	50	T140:250	4350		241/9.49	140/5.51

Product specifications subjects to change without prior notice.

Incandescent wattage comparison refers EU ERP standard if not specified. *Energy star* ERP