


# LED LAMP MINIATURE

www.sotac.com.tw



## B20/C7 Frosted Series

Standard(Non-Dimmable)  
 Rated Voltage: 100V,120V,220-240V,90-250V,50/60Hz  
 Color Temperature: 2700K, 3000K,4000K, 5000K, 6500K  
 Average Lifetime: 15000h  
 Color Rendering Index(TYPE): 80  
 Base: E12,E14,BA15d  
 UV and IR free, Mercury free  
 Suitable for indoor use  
 RoHS compliant

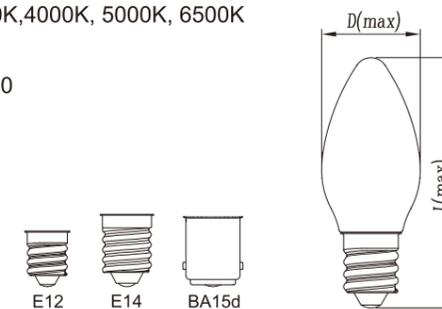


Model Number	Watt (W)	Incandescent Wattage Comparison (W)	LuminousFlux(lm)		Base	M.O.L (mm/in)	M.O.D (mm/in)	Certificate
			2700K/3000K	4000K/5000K/6500K				
K-L1C712-1W	1	C7:10	50	60	E12	53/2.09	20.5/0.81	ETL/C-ETL/FCC/CE/SAA
K-L1B2014S-1W	1	B20:10	50	60	E14	54/2.13		

Product specifications subjects to change without prior notice.

## B20/C7 Clear Series

Standard(Non-Dimmable)  
 Rated Voltage: 100V,120V,220-240V,90-250V,50/60Hz  
 Color Temperature: 2700K, 3000K,4000K, 5000K, 6500K  
 Average Lifetime: 15000h  
 Color Rendering Index(TYPE): 80  
 Base: E12,E14,BA15d  
 UV and IR free, Mercury free  
 Suitable for indoor use  
 RoHS compliant

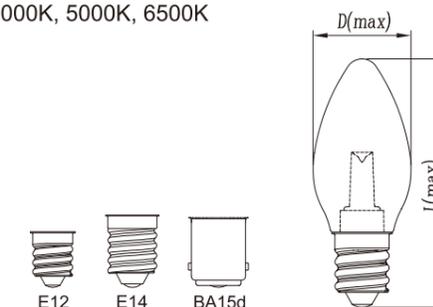

Model Number	Watt (W)	Incandescent Wattage Comparison (W)	LuminousFlux(lm)		Base	M.O.L (mm/in)	M.O.D (mm/in)	Certificate
			2700K/3000K	4000K/5000K/6500K				
K-L1C712A-1W	1	C7:10	50	60	E12	53/2.09	20.5/0.81	ETL/C-ETL/FCC/CE/SAA
K-L1B2014SA-1W	1	B20:10	50	60	E14	54/2.13		

Product specifications subjects to change without prior notice.

## S6 Frosted Series

Standard(Non-Dimmable)

Rated Voltage: 100V,120V,220-240V,90-250V,50/60Hz

Color Temperature: 2700K, 3000K,4000K, 5000K, 6500K

Average Lifetime: 15000h



Color Rendering Index(TYPE): 80

Base: E12,E14,E17,BA15d

UV and IR free, Mercury free

Suitable for indoor use

RoHS compliant



Model Number	Watt (W)	Incandescent Wattage Comparison (W)	LuminousFlux(lm)		Base	M.O.L (mm/in)	M.O.D (mm/in)	Certificate
			2700K/3000K	4000K/5000K/6500K				
K-L1S612-1W	1	S6:10	50	60	E12	47/1.85	19/0.75	ETL/ C-ETL/ FCC/ CE/SAA
K-L1S615-1W	1	S6:10	50	60	Ba15d	49/1.93		

Product specifications subjects to change without prior notice.

## S6 Clear Series

Standard(Non-Dimmable)

Rated Voltage: 100V,120V,220-240V,90-250V,50/60Hz

Color Temperature: 2700K, 3000K,4000K, 5000K, 6500K

Average Lifetime: 15000h



Color Rendering Index(TYPE): 80

Base: E12,E14,E17,BA15d

UV and IR free, Mercury free

Suitable for indoor use

RoHS compliant



Model Number	Watt (W)	Incandescent Wattage Comparison (W)	LuminousFlux(lm)		Base	M.O.L (mm/in)	M.O.D (mm/in)	Certificate
			2700K/3000K	4000K/5000K/6500K				
K-L1S612A-1W	1	S6:10	50	60	E12	47/1.85	19/0.75	ETL/ C-ETL/ FCC/ CE/SAA
K-L1S615A-1W	1	S6:10	50	60	BA15D	49/1.93		

Product specifications subjects to change without prior notice.

## T16/T5 Frosted Series

Standard(Non-Dimmable)

Rated Voltage: 100V,120V,220-240V,90-250V,50/60Hz

Color Temperature: 2700K, 3000K,4000K, 5000K, 6500K

Average Lifetime: 15000h



Color Rendering Index(TYPE): 80

Base: E12,E14,E17,BA15d

UV and IR free, Mercury free

Suitable for indoor use

RoHS compliant



Model Number	Watt (W)	Incandescent Wattage Comparison (W)	LuminousFlux(lm)		Base	M.O.L (mm/in)	M.O.D (mm/in)	Certificate	
			2700K/3000K	4000K/5000K/6500K					
K-L1T512-1W	1	T5:10	50	60	E12	44/1.73	16/0.63	ETL/ C-ETL/ FCC/ CE/SAA	
K-L1T517-1W	1	T5:10	50	60	E14	48/1.89	17/0.67		
K-L1T517-1.5W	1.5	T5:15	80	90	BA15D	48/1.89			
K-L1T515-1W	1	T5:10	50	60		E14	48/1.89		16/0.63
K-L1T515-1.5W	1.5	T5:15	80	90	E14	48/1.89	16/0.63		
K-L1T1614S-1W	1	T16:10	50	60		K-L1T1614S-1.5W	1.5		T16:15

Product specifications subjects to change without prior notice.

## T16/T5 Clear Series

Standard(Non-Dimmable)

Rated Voltage: 100V,120V,220-240V,90-250V,50/60Hz

Color Temperature: 2700K, 3000K,4000K, 5000K, 6500K

Average Lifetime: 15000h



Color Rendering Index(TYPE): 80

Base: E12,E14,E17,BA15d

UV and IR free, Mercury free

Suitable for indoor use

RoHS compliant




Model Number	Watt (W)	Incandescent Wattage Comparison (W)	LuminousFlux(lm)		Base	M.O.L (mm/in)	M.O.D (mm/in)	Certificate	
			2700K/3000K	4000K/5000K/6500K					
K-L1T512A-1W	1	T5:10	50	60	E12	44/1.73	16/0.63	ETL/ C-ETL/ FCC/ CE/SAA	
K-L1T517A-1W	1	T5:10	50	60	E14	48/1.89	17/0.67		
K-L1T517A-1.5W	1.5	T5:15	80	90	BA15D	48/1.89			
K-L1T515A-1W	1	T5:10	50	60		E14	48/1.89		16/0.63
K-L1T515A-1.5W	1.5	T5:15	80	90	E14	48/1.89	16/0.63		
K-L1T1614SA-1W	1	T16:10	50	60		K-L1T1614SA-1.5W	1.5		T16:15

Product specifications subjects to change without prior notice.

## T20/T6 Frosted Series

Standard(Non-Dimmable)  
 Rated Voltage: 100V,120V,220-240V,90-250V,50/60Hz  
 Color Temperature: 2700K, 3000K,4000K, 5000K, 6500K  
 Average Lifetime: 15000h  
 Color Rendering Index(TYPE): 80  
 Base: E12,E14,E17,BA15d  
 UV and IR free, Mercury free  
 Suitable for indoor use  
 RoHS compliant

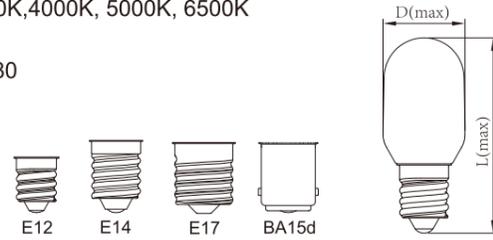


Model Number	Watt (W)	Incandescent Wattage Comparison (W)	LuminousFlux(lm)		Base	M.O.L (mm/in)	M.O.D (mm/in)	Certificate
			2700K/3000K	4000K/5000K/6500K				
K-L1T612-1W	1	T6:10	50	60	E12	45/1.77	19/0.75	ETL/ C-ETL/ FCC/
K-L1T617-1W	1	T6:10	50	60	E17	49/1.93	20/0.79	
K-L1T617-1.5W	1.5	T6:15	80	90	BA15D	49/1.9		
K-L1T615-1W	1	T6:10	50	60				
K-L1T615-1.5W	1.5	T6:15	80	90				
K-L1T2014S-1W	1	T6:10	50	60	E14	49/1.9	19/0.75	
K-L1T2014S-1.5W	1.5	T6:15	80	90				

Product specifications subjects to change without prior notice.

## T20/T6 Clear Series

Standard(Non-Dimmable)  
 Rated Voltage: 100V,120V,220-240V,90-250V,50/60Hz  
 Color Temperature: 2700K, 3000K,4000K, 5000K, 6500K  
 Average Lifetime: 15000h  
 Color Rendering Index(TYPE): 80  
 Base: E12,E14,E17,BA15d  
 UV and IR free, Mercury free  
 Suitable for indoor use  
 RoHS compliant

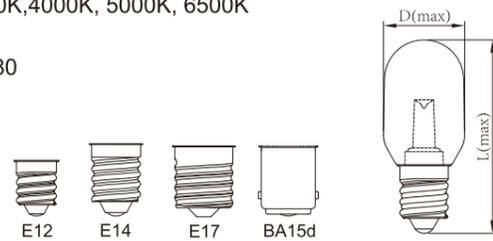


Model Number	Watt (W)	Incandescent Wattage Comparison (W)	LuminousFlux(lm)		Base	M.O.L (mm/in)	M.O.D (mm/in)	Certificate
			2700K/3000K	4000K/5000K/6500K				
K-L1T612A-1W	1	T6:10	50	60	E12	45/1.77	19/0.75	ETL/ C-ETL/ FCC/
K-L1T617A-1W	1	T6:10	50	60	E17	49/1.93	20/0.79	
K-L1T617A-1.5W	1.5	T6:15	80	90	BA15D	49/1.9		
K-L1T615A-1W	1	T6:10	50	60				
K-L1T615A-1.5W	1.5	T6:15	80	90				
K-L1T2014SA-1W	1	T20:10	50	60	E14	49/1.9	19/0.75	
K-L1T2014SA-1.5W	1.5	T20:15	80	90				

Product specifications subjects to change without prior notice.

## T22/T7(T25/T8) Frosted Series

Standard(Non-Dimmable)  
 Rated Voltage: 100V,120V,220-240V,90-250V,50/60Hz  
 Color Temperature: 2700K, 3000K,4000K, 5000K, 6500K  
 Average Lifetime: 15000h  
 Color Rendering Index(TYPE): 80  
 Base: E12,E14,E17,BA15d  
 UV and IR free, Mercury free  
 Suitable for indoor use  
 RoHS compliant

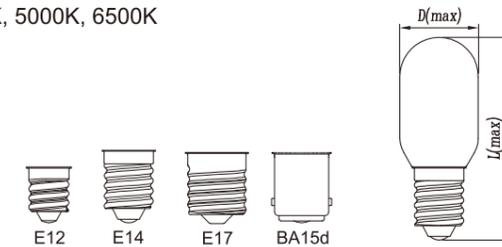


Model Number	Watt (W)	Incandescent Wattage Comparison (W)	LuminousFlux(lm)		Base	M.O.L (mm/in)	M.O.D (mm/in)	Certificate
			2700K/3000K	4000K/5000K/6500K				
K-L1T712-1W	1	T7/T8:10	50	60	E12	49/1.93	22/0.87	ETL/ C-ETL/ FCC/
K-L1T717-1W	1	T7/T8:10	50	60	E17	53/2.09		
K-L1T717-1.5W	1.5	T7/T8:15	80	90	BA15D	53/2.09		
K-L1T715-1W	1	T7/T8:10	50	60				
K-L1T715-1.5W	1.5	T7/T8:15	80	90				
K-L1T2214S-1W	1	T22/T25:10	50	60	E14	56/2.20		
K-L1T2214S-1.5W	1.5	T22/T25:15	80	90				

Product specifications subjects to change without prior notice.

## T22/T7(T25/T8) Clear Series

Standard(Non-Dimmable)  
 Rated Voltage: 100V,120V,220-240V,90-250V,50/60Hz  
 Color Temperature: 2700K, 3000K,4000K, 5000K, 6500K  
 Average Lifetime: 15000h  
 Color Rendering Index(TYPE): 80  
 Base: E12,E14,E17,BA15d  
 UV and IR free, Mercury free  
 Suitable for indoor use  
 RoHS compliant

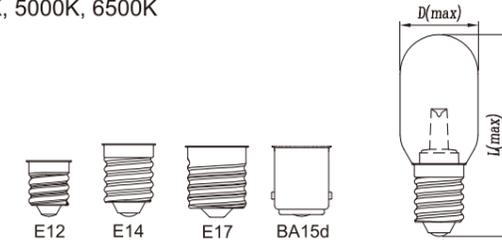

Model Number	Watt (W)	Incandescent Wattage Comparison (W)	LuminousFlux(lm)		Base	M.O.L (mm/in)	M.O.D (mm/in)	Certificate
			2700K/3000K	4000K/5000K/6500K				
K-L1T712A-1W	1	T7/T8:10	50	60	E12	49/1.93	22/0.87	ETL/ C-ETL/ FCC/
K-L1T717A-1W	1	T7/T8:10	50	60	E17	53/2.09		
K-L1T717A-1.5W	1.5	T7/T8:15	80	90	BA15D	53/2.09		
K-L1T715A-1W	1	T7/T8:10	50	60				
K-L1T715A-1.5W	1.5	T7/T8:15	80	90				
K-L1T2214SA-1W	1	T22/T25:10	50	60	E14	56/2.20		
K-L1T2214SA-1.5W	1.5	T22/T25:15	80	90				

Product specifications subjects to change without prior notice.

## ST26 Frosted Series

Standard(Non-Dimmable)

Rated Voltage: 100V-130V,220-240V,90-250V,50/60Hz

Color Temperature: 2700K, 3000K,4000K, 5000K, 6500K

Average Lifetime: 15000h


Color Rendering Index(TYPE): 80

Base: E14,B15d

UV and IR free, Mercury free

Suitable for indoor use

RoHS compliant

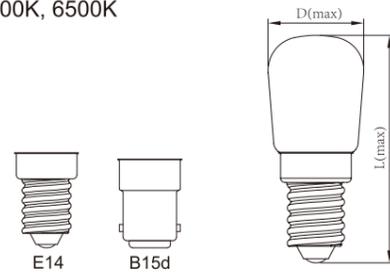

Model Number	Watt (W)	Incandescent Wattage Comparison (W)	LuminousFlux(lm)		Base	M.O.L (mm/in)	M.O.D (mm/in)	Certificate
			2700K/3000K	4000K/5000K/6500K				
K-L1ST2614-1W	1	ST26:10	50	60	E14	55/2.17	23/0.91	CE/SAA
K-L1ST2614-1.5W	1.5	ST26:15	80	90				

Product specifications subjects to change without prior notice.

## T32/T10 Frosted Series

Standard(Non-Dimmable)

Rated Voltage: 100V,120V,100V-130V,220-240V,90-250V,50/60Hz

Color Temperature: 2700K, 3000K,4000K, 5000K, 6500K

Average Lifetime: 15000h


Color Rendering Index(TYPE): 80

Base: E26,E27,B22d

UV and IR free, Mercury free

Suitable for indoor use

RoHS compliant

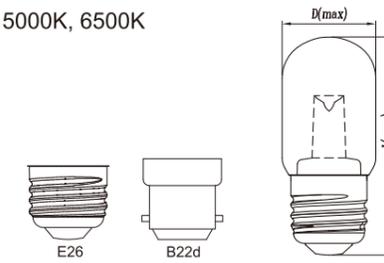

Model Number	Watt (W)	Incandescent Wattage Comparison (W)	LuminousFlux(lm)		Base	M.O.L (mm/in)	M.O.D (mm/in)	Certificate
			2700K/3000K	4000K/5000K/6500K				
K-L1T1026A-1W	1	T10:10	50	60	E26	72/2.83	24/0.94	ETL/ C-ETL/ FCC/
K-L1T1026A-1.5W	1.5	T10:15	80	90				
K-L1T3227A-1W	1	T32:10	50	60	E27	75/2.95	24/0.94	CE/SAA
K-L1T3227A-1.5W	1.5	T32:15	80	90				

Product specifications subjects to change without prior notice.

## ST26 Clear Series

Standard(Non-Dimmable)

Rated Voltage: 100V-130V,220-240V,90-250V,50/60Hz

Color Temperature: 2700K, 3000K,4000K, 5000K, 6500K

Average Lifetime: 15000h


Color Rendering Index(TYPE): 80

Base: E14,B15d

UV and IR free, Mercury free

Suitable for indoor use

RoHS compliant

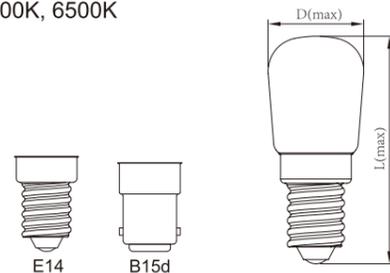

Model Number	Watt (W)	Incandescent Wattage Comparison (W)	LuminousFlux(lm)		Base	M.O.L (mm/in)	M.O.D (mm/in)	Certificate
			2700K/3000K	4000K/5000K/6500K				
K-L1ST2614A-1W	1	ST26:10	50	60	E14	55/2.17	23/0.91	CE/SAA
K-L1ST2614A-1.5W	1.5	ST26:15	80	90				

Product specifications subjects to change without prior notice.

## T32/T10 Clear Series

Standard(Non-Dimmable)

Rated Voltage: 100V,120V,100V-130V,220-240V,90-250V,50/60Hz

Color Temperature: 2700K, 3000K,4000K, 5000K, 6500K

Average Lifetime: 15000h


Color Rendering Index(TYPE): 80

Base: E26,E27,B22d

UV and IR free, Mercury free

Suitable for indoor use

RoHS compliant

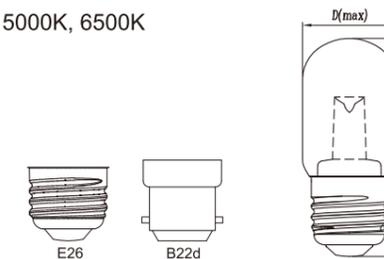

Model Number	Watt (W)	Incandescent Wattage Comparison (W)	LuminousFlux(lm)		Base	M.O.L (mm/in)	M.O.D (mm/in)	Certificate
			2700K/3000K	4000K/5000K/6500K				
K-L1T1026A-1W	1	T10:10	50	60	E26	72/2.83	24/0.94	ETL/ C-ETL/ FCC/
K-L1T1026A-1.5W	1.5	T10:15	80	90				
K-L1T3227A-1W	1	T32:10	50	60	E27	75/2.95	24/0.94	CE/SAA
K-L1T3227A-1.5W	1.5	T32:15	80	90				

Product specifications subjects to change without prior notice.

## G35/S11 Frosted Series

Standard(Non-Dimmable)

Rated Voltage: 100V,120V,100V-130V,220-240V,90-250V,50/60Hz

Color Temperature: 2700K, 3000K,4000K, 5000K, 6500K

Average Lifetime: 15000h


Color Rendering Index(TYPE): 80

Base: E26,E27,B22d

UV and IR free, Mercury free

Suitable for indoor use

RoHS compliant

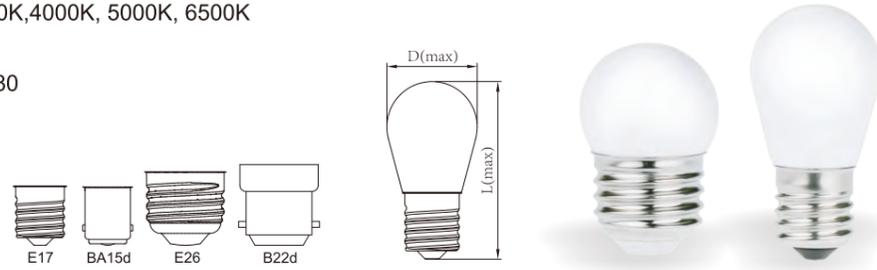

Model Number Standard	Watt (W)	Incandescent Wattage Comparison (W)	LuminousFlux(lm)		Base	M.O.L (mm/in)	M.O.D (mm/in)	Certificate
			2700K/ 3000K	4000K/ 5000K/ 6500K				
K-L1S1117-1W	1	S11:10	50	60	E17	53/2.09	27/1.06	ETL/ C-ETL/ FCC/ CE/SAA
K-L1S1117-1.5W	1.5	S11:15	80	90				
K-L1S1126-1W	1	S11:10	50	60	E26	51/2.01	33/1.30	
K-L1S1126-1.5W	1.5	S11:15	80	90				
K-L1G3527-1W	1	G35:10	50	60	E27	54/2.13	33/1.30	CE/SAA
K-L1G3527-1.5W	1.5	G35:15	80	90				

Product specifications subjects to change without prior notice.

## G35/S11 Clear Series

Standard(Non-Dimmable)

Rated Voltage: 100V,120V,100V-130V,220-240V,90-250V,50/60Hz

Color Temperature: 2700K, 3000K,4000K, 5000K, 6500K

Average Lifetime: 15000h


Color Rendering Index(TYPE): 80

Base: E26,E27,B22d

UV and IR free, Mercury free

Suitable for indoor use

RoHS compliant

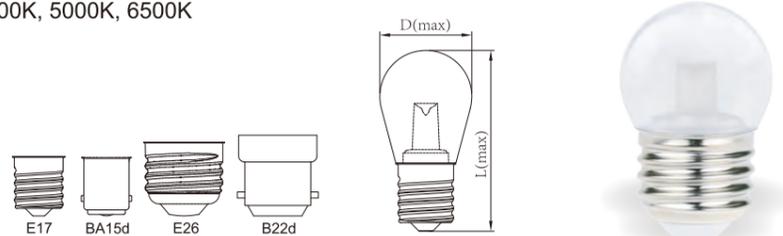

Model Number Standard	Watt (W)	Incandescent Wattage Comparison (W)	LuminousFlux(lm)		Base	M.O.L (mm/in)	M.O.D (mm/in)	Certificate
			2700K/ 3000K	4000K/ 5000K/ 6500K				
K-L1S1117A-1W	1	S11:10	50	60	E17	53/2.09	27/1.06	ETL/ C-ETL/ FCC/ CE/SAA
K-L1S1117A-1.5W	1.5	S11:15	80	90				
K-L1S1126A-1W	1	S11:10	50	60	E26	51/2.01	33/1.30	
K-L1S1126A-1.5W	1.5	S11:15	80	90				
K-L1G3527A-1W	1	G35:10	50	60	E27	54/2.13	33/1.30	CE/SAA
K-L1G3527A-1.5W	1.5	G35:15	80	90				

Product specifications subjects to change without prior notice.

## A45/S14 Frosted Series

Standard(Non-Dimmable)

Rated Voltage: 100V,120V,100V-130V,220-240V,90-250V,50/60Hz

Color Temperature: 2700K, 3000K,4000K, 5000K, 6500K

Average Lifetime: 15000h


Color Rendering Index(TYPE): 80

Base: E26,E27,B22d

UV and IR free, Mercury free

Suitable for indoor use

RoHS compliant

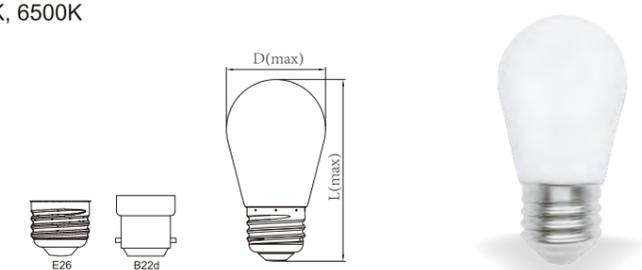

Model Number Standard	Watt(W)	Incandescent Wattage Comparison (W)	Luminous Flux(lm)		Base	M.O.L mm/ft	M.O.D mm/inch	Certificate
			2700k/ 3000K	4000K/5000K/ 6500K				
K-L1S1426-1W	1	S14:10	50	60	E26	82/3.23	45/1.77	ETL/ C-ETL/FCC
K-L1S1426-1.5W	1.5	S14:15	120	130				
K-L1A4527-1W	1	A45:10	50	60	E27	85/3.35	45/1.77	CE/SAA
K-L1A4527-1.5W	1.5	A45:15	120	130				

Product specifications subjects to change without prior notice.

## A45/S14 Clear Series

Standard(Non-Dimmable)

Rated Voltage: 100V,120V,100V-130V,220-240V,90-250V,50/60Hz

Color Temperature: 2700K, 3000K,4000K, 5000K, 6500K

Average Lifetime: 15000h


Color Rendering Index(TYPE): 80

Base: E26,E27,B22d

UV and IR free, Mercury free

Suitable for indoor use

RoHS compliant

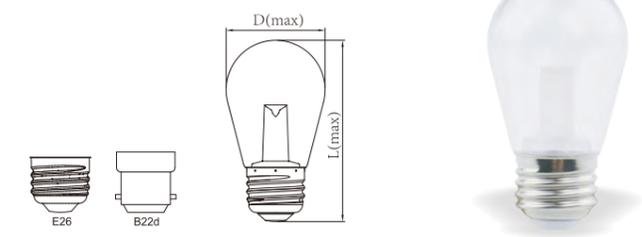

Model Number Standard	Watt(W)	Incandescent Wattage Comparison (W)	Luminous Flux(lm)		Base	M.O.L mm/ft	M.O.D mm/inch	Certificate
			2700k/ 3000K	4000K/5000K/ 6500K				
K-L1S1426A-1W	1	S14:10	50	60	E26	82/3.23	45/1.77	ETL/ C-ETL/FCC
K-L1S1426A-1.5W	1.5	S14:15	120	130				
K-L1A4527A-1W	1	A45:10	50	60	E27	85/3.35	45/1.77	CE/SAA
K-L1A4527A-1.5W	1.5	A45:15	120	130				

Product specifications subjects to change without prior notice.